




Porter-Cable PC60TAG Motor Brush Replacement

Replace the brushes of your Porter-Cable PC60TAG.

Written By: Mackenzie Fairbanks

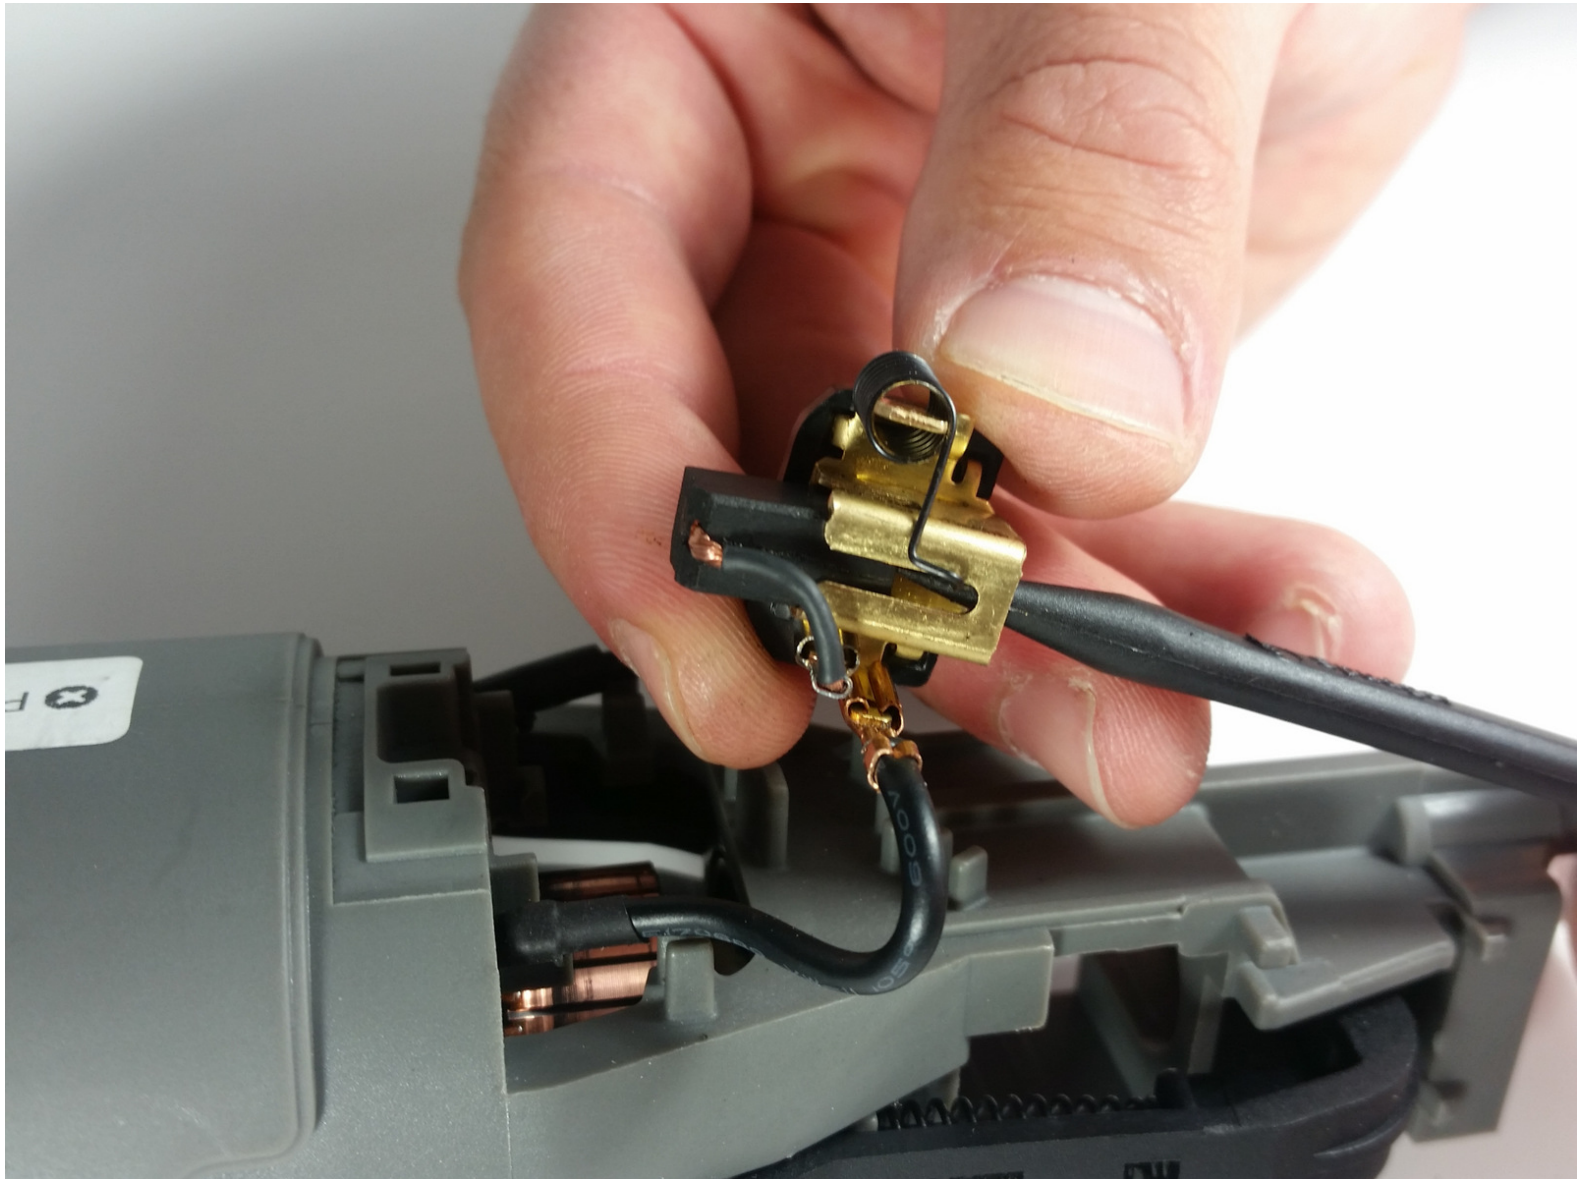

INTRODUCTION

The motor brushes of the Porter-Cable PC60TAG provide a conducting path to the motor, and they may eventually wear down as the device begins to age. Use this guide to replace the brushes of your Porter-Cable PC60TAG.



TOOLS:

- [Phillips #2 Screwdriver](#) (1)
 - [Heavy-Duty Spudger](#) (1)
 - [Small Needle Nose Pliers](#) (1)
-


Step 1 — Motor Brush



- Using the Phillips #2 screwdriver, remove the 3/4" screw on the back cover.


⚠ Unplug the grinder before disassembling.

Step 2

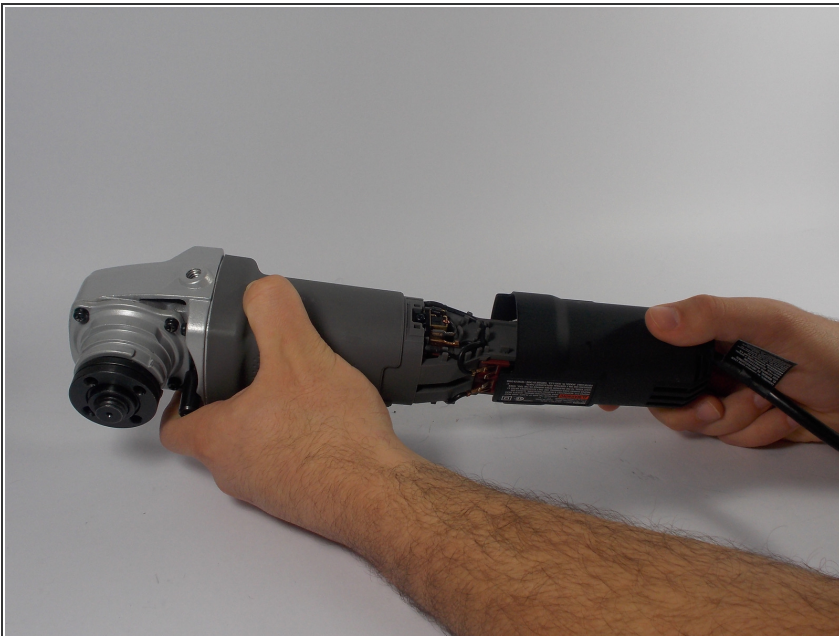

- Holding the front of the device, carefully slide the back cover over the cord.

Step 3

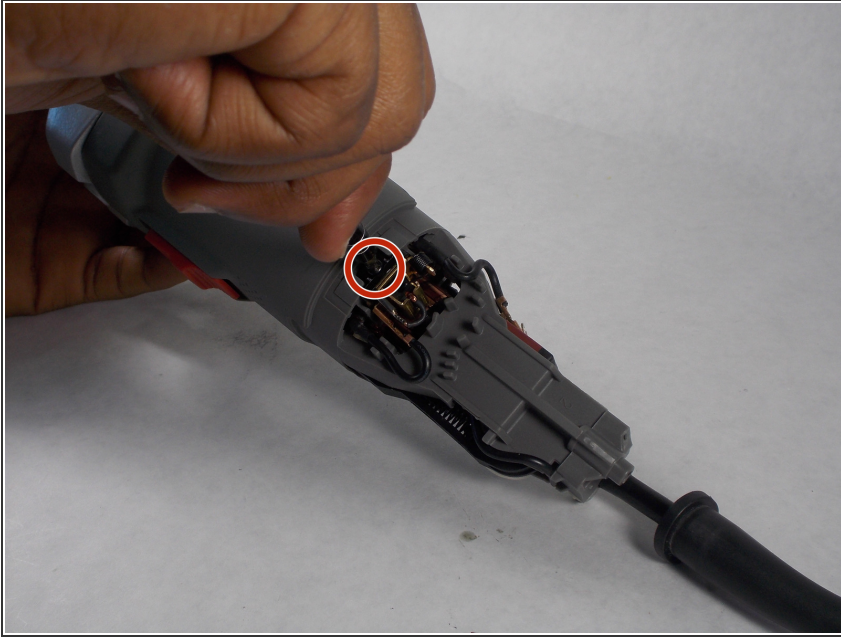

- Using the Phillips #2 screwdriver, remove the 1/2" screw holding on the motor brush arm.

Step 4





- Carefully pull the motor brush arm away from the other device.

Step 5




- Using the spudger, carefully lift the spring on the motor brush arm off of the motor brush and gently pull it to the side of the motor brush arm.
- ⓘ Be careful not to over bend the spring, as this could damage the spring and require replacement.

Step 6

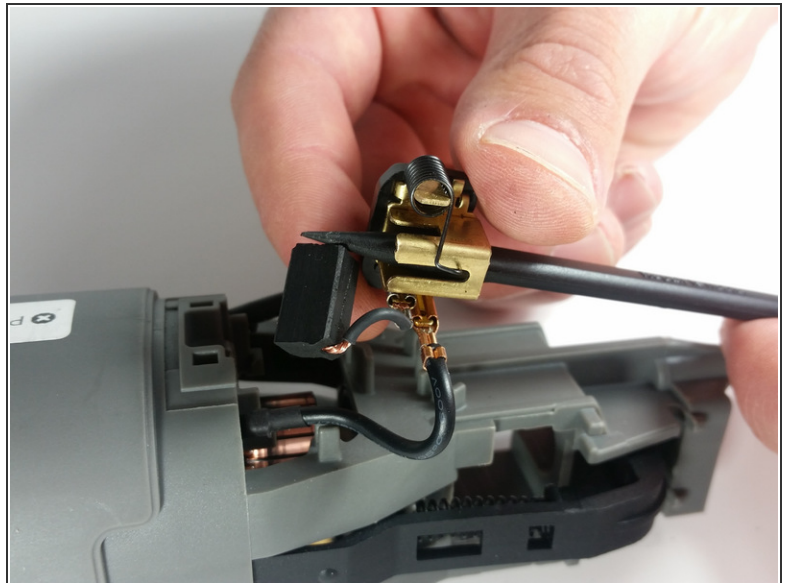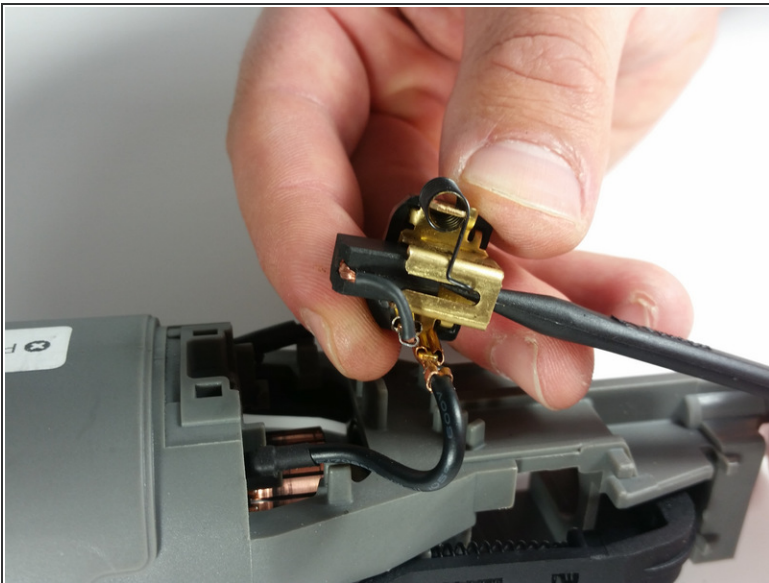

- Using the spudger, gently push the motor brush out of the arm.

Step 7

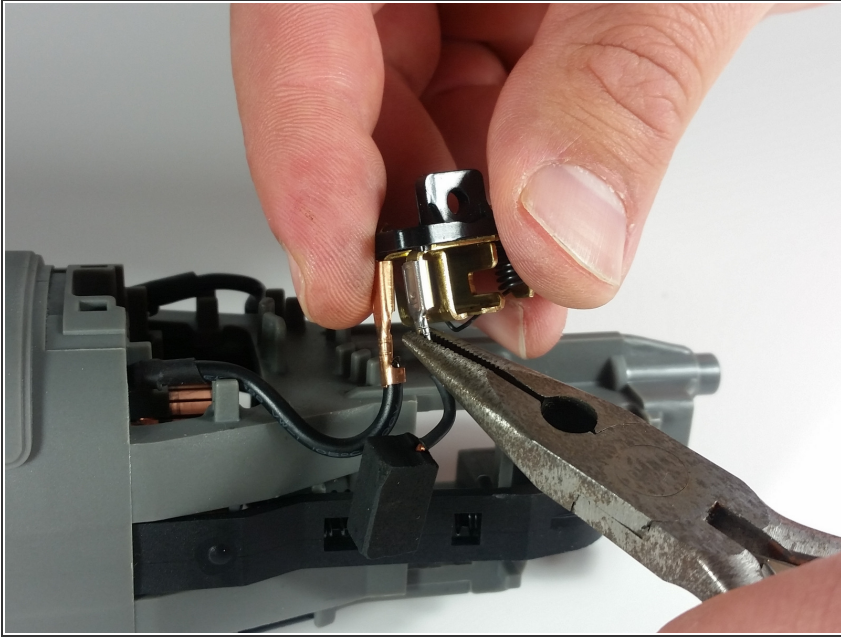

- Using a pair of needle nose pliers, gently pull the motor brush terminal off of the motor brush arm.
- Repeat steps 3-7 on the other side of the device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-17 11:33:31 AM.